

REAR BEDROOM


ELECTRICAL POSITIONS + MAIN FURNITURE SIZES

19 OCT 2026 | Electrical v004 - proposed room set-out

All measurements are in centimetres (cm), rounded to the nearest 1 cm.
Board distances and heights are to the CENTRE of the visible plate.

TOP VIEW - letters identify wall corners; numbers identify boards

Orange = doorway. Do not scale measurements off this drawing. Open-plan edges are not extra walls.

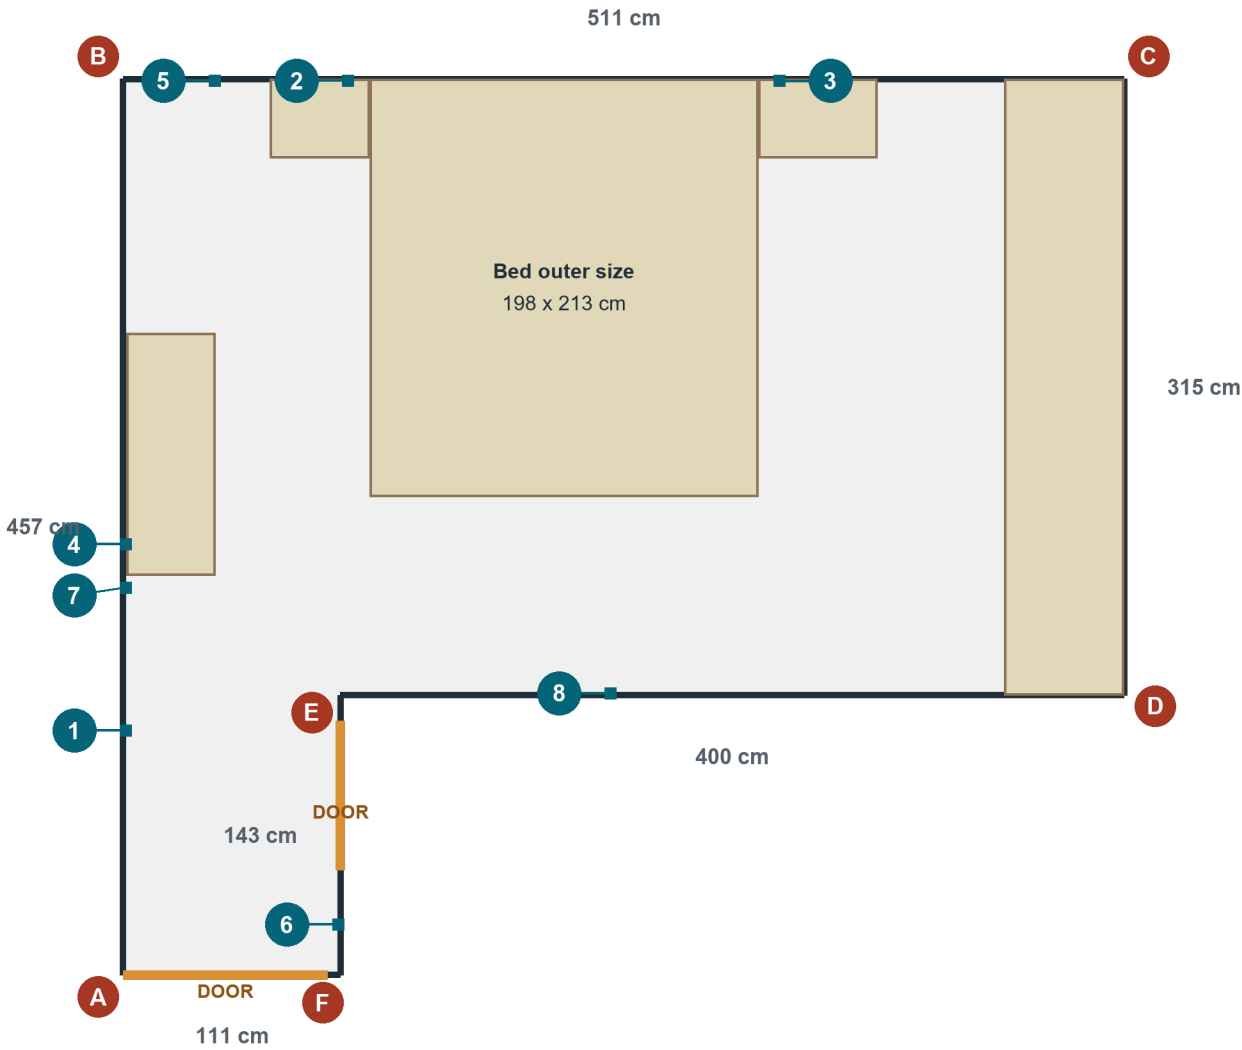

WHERE TO PUT EACH BOARD

- Bedroom 1 entry**
From corner A, measure 125 cm along the SAME wall. Centre: 115 cm above finished floor.
Main room lights / Ceiling cove lights / Ceiling fan / AC power isolator
- B1 bedside A**
From corner B, measure 115 cm along the SAME wall. Centre: 65 cm above finished floor.
Charging socket / Main room lights / Ceiling cove lights
- B1 bedside B**
From corner C, measure 176 cm along the SAME wall. Centre: 65 cm above finished floor.
Charging socket / Main room lights / Ceiling cove lights
- Back vanity / laptop**
From corner A, measure 220 cm along the SAME wall. Centre: 108 cm above finished floor.
Vanity / laptop socket / Charger socket / Wired internet port / Mirror task light
- Back cleaning socket**
From corner B, measure 47 cm along the SAME wall. Centre: 45 cm above finished floor.
Utility socket
- Bath 1 outside light / fan / mirror**
From corner F, measure 26 cm along the SAME wall. Centre: 115 cm above finished floor.
Bathroom ceiling light / Bathroom exhaust fan / Geyser power isolator / Mirror task light
- B1 AC connection reservation**
From corner A, measure 198 cm along the SAME wall. Centre: 225 cm above finished floor.
AC connection reservation
- Rear bedroom TV power and data**
From corner E, measure 138 cm along the SAME wall. Centre: 125 cm above finished floor.
TV socket / TV wired data

BED / FURNITURE SIZES

Bed outer size: 198 cm across this drawing x 213 cm up/down this drawing
Mattress: 191 cm across this drawing x 206 cm up/down this drawing
Wardrobe: 61 cm across this drawing x 315 cm up/down this drawing; top 239 cm above floor.
Vanity top: 45 cm across this drawing x 124 cm up/down this drawing; top 75 cm above floor.
Bedside table A: 61 cm across this drawing x 41 cm up/down this drawing; top 48 cm above floor.
Bedside table B: 51 cm across this drawing x 41 cm up/down this drawing; top 48 cm above floor.

Measure from the finished wall corner, not a door frame, cupboard or bed edge. Height starts at the finished floor, not skirting or tabletop.

PROPOSED MODEL DIMENSIONS - electrician must check on site before cutting. Equipment connection reservations are NOT approved sockets or installation marks; concealed points need designed service access. Bathroom switches stay outside: no shower partitions are planned.

MIDDLE BEDROOM


ELECTRICAL POSITIONS + MAIN FURNITURE SIZES

19 OCT 2026 | Electrical v004 - proposed room set-out

All measurements are in centimetres (cm), rounded to the nearest 1 cm.
Board distances and heights are to the CENTRE of the visible plate.

TOP VIEW - letters identify wall corners; numbers identify boards

Orange = doorway. Do not scale measurements off this drawing. Open-plan edges are not extra walls.

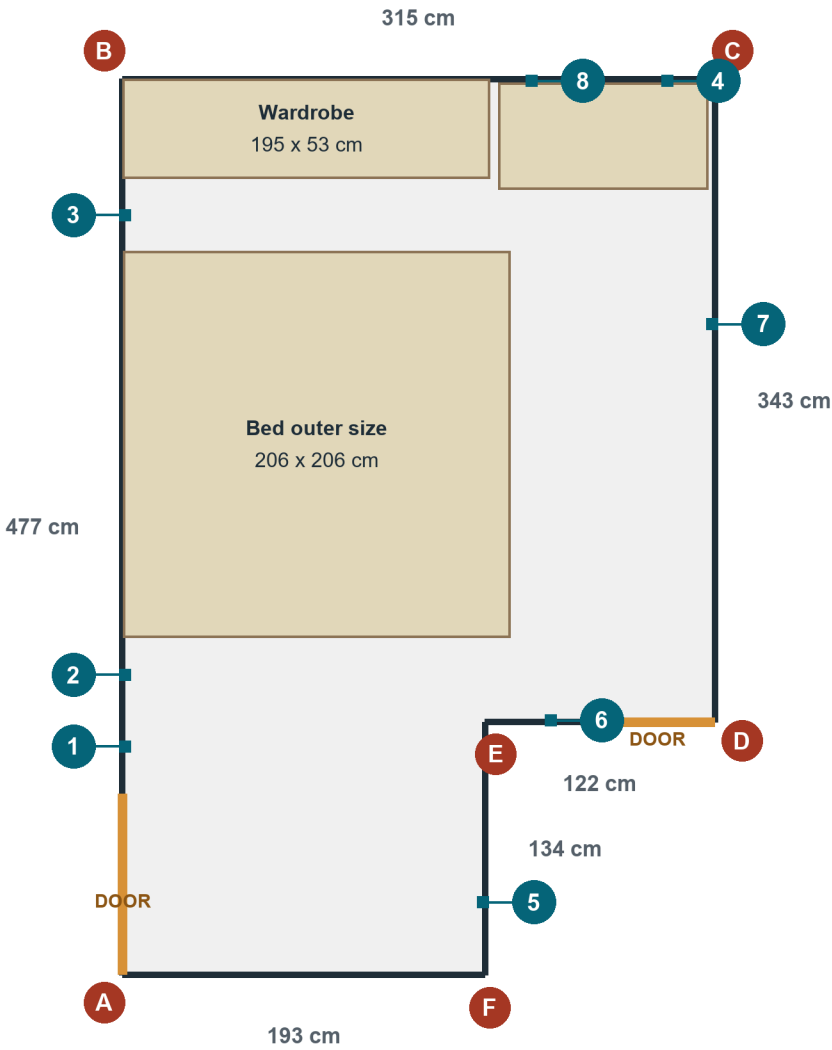

WHERE TO PUT EACH BOARD

- 1. Bedroom 2 entry**
From corner A, measure 122 cm along the SAME wall. Centre: 115 cm above finished floor.
Main room lights / Ceiling cove lights / Ceiling fan / AC power isolator
- 2. B2 bedside A**
From corner A, measure 160 cm along the SAME wall. Centre: 65 cm above finished floor.
Charging socket / Main room lights / Ceiling cove lights
- 3. B2 bedside B**
From corner B, measure 73 cm along the SAME wall. Centre: 65 cm above finished floor.
Charging socket / Main room lights / Ceiling cove lights
- 4. Middle study**
From corner C, measure 25 cm along the SAME wall. Centre: 98 cm above finished floor.
Monitor socket / Task lamp socket / Laptop socket / Wired internet port
- 5. Middle dry grooming**
From corner F, measure 39 cm along the SAME wall. Centre: 108 cm above finished floor.
Grooming / utility socket / Charger socket / Mirror task light
- 6. Bath 2 outside light / fan / mirror**
From corner E, measure 35 cm along the SAME wall. Centre: 115 cm above finished floor.
Bathroom ceiling light / Bathroom exhaust fan / Geyser power isolator / Mirror task light
- 7. Middle separate cleaning**
From corner C, measure 131 cm along the SAME wall. Centre: 45 cm above finished floor.
Utility socket
- 8. B2 AC connection reservation**
From corner C, measure 97 cm along the SAME wall. Centre: 225 cm above finished floor.
AC connection reservation

BED / FURNITURE SIZES

Bed outer size: 206 cm across this drawing x 206 cm up/down this drawing
Mattress: 199 cm across this drawing x 199 cm up/down this drawing
Wardrobe: 195 cm across this drawing x 53 cm up/down this drawing; top 239 cm above floor.
Study top: 112 cm across this drawing x 57 cm up/down this drawing; top 74 cm above floor.
Two proposed compact bedside shelves: 22 x 28 cm each; top about 50 cm above the finished floor.

Measure from the finished wall corner, not a door frame, cupboard or bed edge. Height starts at the finished floor, not skirting or tabletop.

PROPOSED MODEL DIMENSIONS - electrician must check on site before cutting. Equipment connection reservations are NOT approved sockets or installation marks; concealed points need designed service access. Bathroom switches stay outside: no shower partitions are planned.

FRONT BEDROOM


ELECTRICAL POSITIONS + MAIN FURNITURE SIZES

19 OCT 2026 | Electrical v004 - proposed room set-out

All measurements are in centimetres (cm), rounded to the nearest 1 cm.
Board distances and heights are to the CENTRE of the visible plate.

TOP VIEW - letters identify wall corners; numbers identify boards

Orange = doorway. Do not scale measurements off this drawing. Open-plan edges are not extra walls.

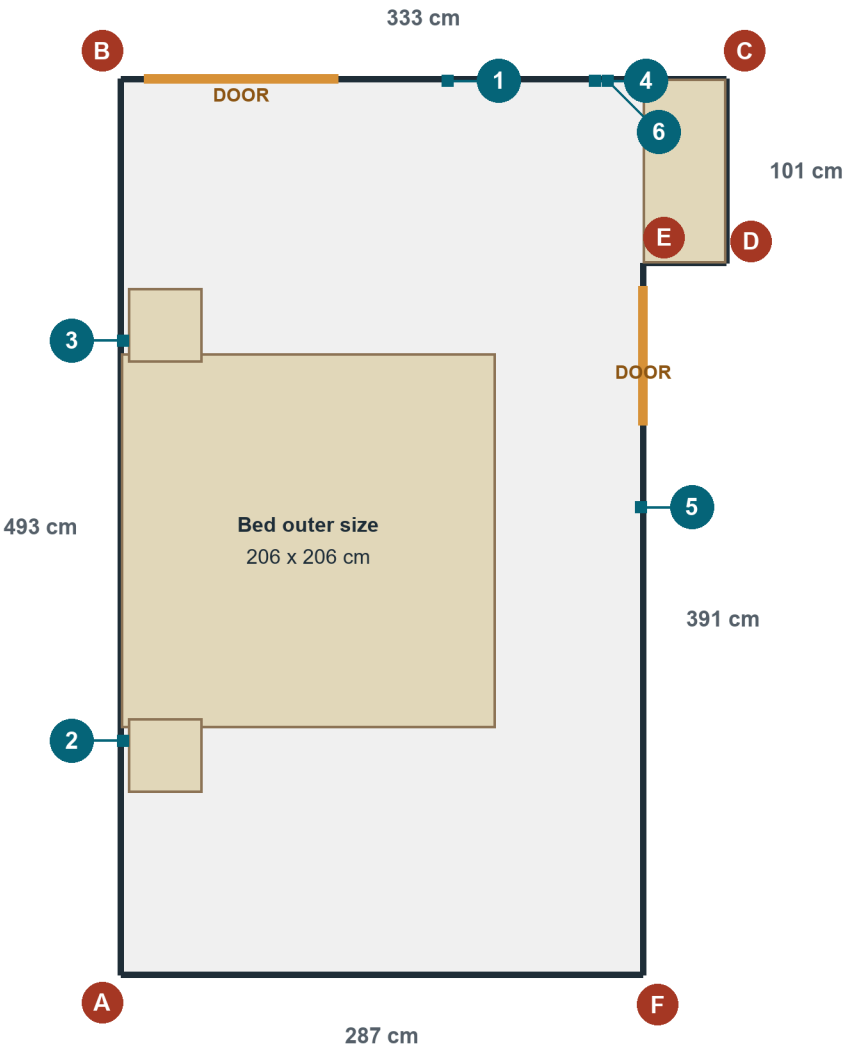

WHERE TO PUT EACH BOARD

- 1. Bedroom 3 entry**
From corner C, measure 153 cm along the SAME wall. Centre: 115 cm above finished floor.
Main room lights / Ceiling cove lights / Ceiling fan / AC power isolator
- 2. B3 bedside A**
From corner A, measure 129 cm along the SAME wall. Centre: 65 cm above finished floor.
Charging socket / Main room lights / Ceiling cove lights
- 3. B3 bedside B**
From corner B, measure 144 cm along the SAME wall. Centre: 65 cm above finished floor.
Charging socket / Main room lights / Ceiling cove lights
- 4. Front vanity / laptop**
From corner C, measure 72 cm along the SAME wall. Centre: 108 cm above finished floor.
Vanity / laptop socket / Charger socket / Wired internet port / Mirror task light
- 5. Front cleaning socket**
From corner E, measure 134 cm along the SAME wall. Centre: 45 cm above finished floor.
Utility socket
- 6. B3 AC connection reservation**
From corner C, measure 65 cm along the SAME wall. Centre: 225 cm above finished floor.
AC connection reservation

BED / FURNITURE SIZES

Bed outer size: 206 cm across this drawing x 206 cm up/down this drawing
Mattress: 198 cm across this drawing x 198 cm up/down this drawing
Vanity: 46 cm across this drawing x 101 cm up/down this drawing; top 77 cm above floor.
Bedside table A: 41 cm across this drawing x 41 cm up/down this drawing; top 48 cm above floor.
Bedside table B: 41 cm across this drawing x 41 cm up/down this drawing; top 48 cm above floor.

Measure from the finished wall corner, not a door frame, cupboard or bed edge. Height starts at the finished floor, not skirting or tabletop.

PROPOSED MODEL DIMENSIONS - electrician must check on site before cutting. Equipment connection reservations are NOT approved sockets or installation marks; concealed points need designed service access. Bathroom switches stay outside: no shower partitions are planned.

HALL / FAMILY LOUNGE


ELECTRICAL POSITIONS + MAIN FURNITURE SIZES

19 OCT 2026 | Electrical v004 - proposed room set-out

All measurements are in centimetres (cm), rounded to the nearest 1 cm.
Board distances and heights are to the CENTRE of the visible plate.

TOP VIEW - letters identify wall corners; numbers identify boards

Orange = doorway. Do not scale measurements off this drawing. Open-plan edges are not extra walls.

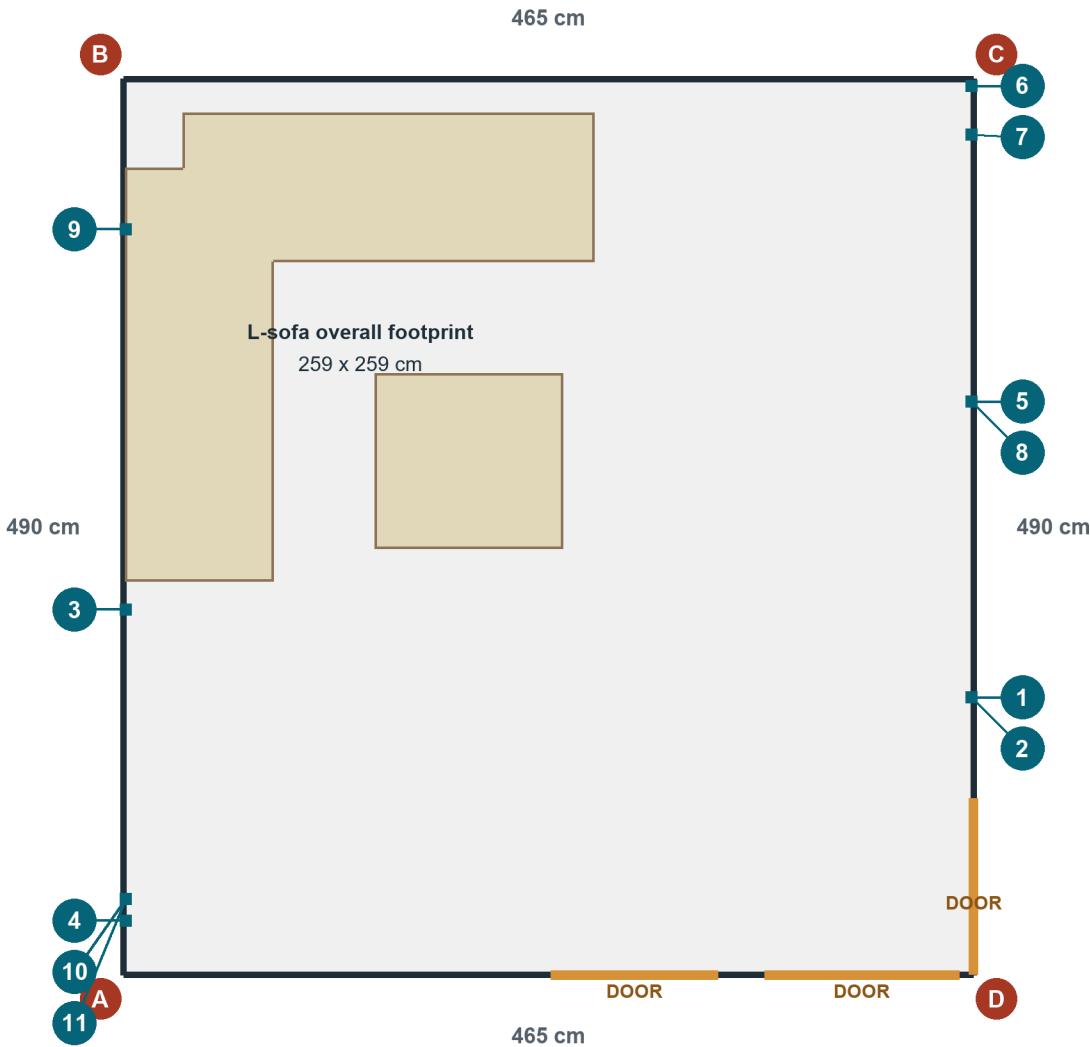

WHERE TO PUT EACH BOARD

- Hall arrival**
From corner D, measure 152 cm along the SAME wall. Centre: 115 cm above finished floor.
Route cove / Seating cove / Ceiling fan / AC power isolator
- Hall cleaning**
From corner D, measure 152 cm along the SAME wall. Centre: 45 cm above finished floor.
Utility socket
- Hall sofa charging**
From corner A, measure 200 cm along the SAME wall. Centre: 105 cm above finished floor.
Phone socket / USB-C port
- Mandir electric light**
From corner A, measure 30 cm along the SAME wall. Centre: 115 cm above finished floor.
Mandir
- Media mains only**
From corner C, measure 177 cm along the SAME wall. Centre: 125 cm above finished floor.
TV socket / Set-top socket
- Lobby arrival lighting**
From corner C, measure 4 cm along the SAME wall. Centre: 115 cm above finished floor.
Lobby route / Hall route
- Wi-Fi selected backup**
From corner C, measure 31 cm along the SAME wall. Centre: 90 cm above finished floor.
ONT socket / Router socket
- Media passive data**
From corner C, measure 177 cm along the SAME wall. Centre: 143 cm above finished floor.
Wired internet port
- HA AC connection reservation**
From corner B, measure 83 cm along the SAME wall. Centre: 225 cm above finished floor.
AC connection reservation
- Aquarium filter / aerator / light reservation**
From corner A, measure 42 cm along the SAME wall. Centre: 35 cm above finished floor.
Aquarium filter / aerator / light
- Aquarium accessible power isolation**
From corner A, measure 42 cm along the SAME wall. Centre: 115 cm above finished floor.
Aquarium power isolation

BED / FURNITURE SIZES

L-sofa overall footprint: 259 cm across this drawing x 259 cm up/down this drawing; top 33 cm above floor.
Coffee table: 103 cm across this drawing x 96 cm up/down this drawing; top 39 cm above floor.

Measure from the finished wall corner, not a door frame, cupboard or bed edge. Height starts at the finished floor, not skirting or tabletop.

PROPOSED MODEL DIMENSIONS - electrician must check on site before cutting. Equipment connection reservations are NOT approved sockets or installation marks; concealed points need designed service access. Bathroom switches stay outside: no shower partitions are planned.

DINING


ELECTRICAL POSITIONS + MAIN FURNITURE SIZES

19 OCT 2026 | Electrical v004 - proposed room set-out

All measurements are in centimetres (cm), rounded to the nearest 1 cm.
Board distances and heights are to the CENTRE of the visible plate.

TOP VIEW - letters identify wall corners; numbers identify boards

Orange = doorway. Do not scale measurements off this drawing. Open-plan edges are not extra walls.

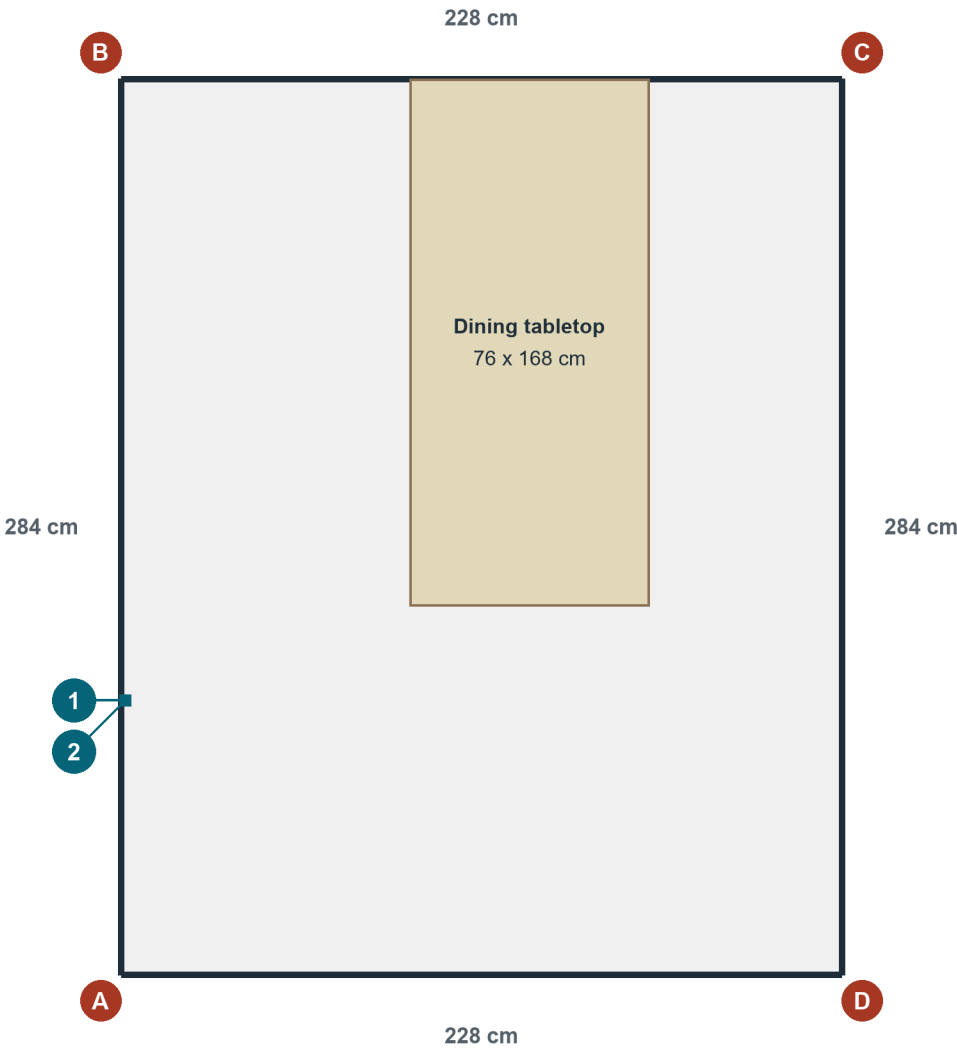

WHERE TO PUT EACH BOARD

1. Dining arrival lighting

From corner A, measure 87 cm along the SAME wall. Centre: 115 cm above finished floor.
Dining / route / Lightwell

2. Dining utility / dock

From corner A, measure 87 cm along the SAME wall. Centre: 55 cm above finished floor.
Dock socket / Utility socket / Charger socket

BED / FURNITURE SIZES

Dining tabletop: 76 cm across this drawing x 168 cm up/down this drawing; top 75 cm above floor.

Measure from the finished wall corner, not a door frame, cupboard or bed edge. Height starts at the finished floor, not skirting or tabletop.

PROPOSED MODEL DIMENSIONS - electrician must check on site before cutting. Equipment connection reservations are NOT approved sockets or installation marks; concealed points need designed service access. Bathroom switches stay outside: no shower partitions are planned.

KITCHEN


ELECTRICAL POSITIONS + MAIN FURNITURE SIZES

19 OCT 2026 | Electrical v004 - proposed room set-out

All measurements are in centimetres (cm), rounded to the nearest 1 cm.
Board distances and heights are to the CENTRE of the visible plate.

TOP VIEW - letters identify wall corners; numbers identify boards

Orange = doorway. Do not scale measurements off this drawing. Open-plan edges are not extra walls.

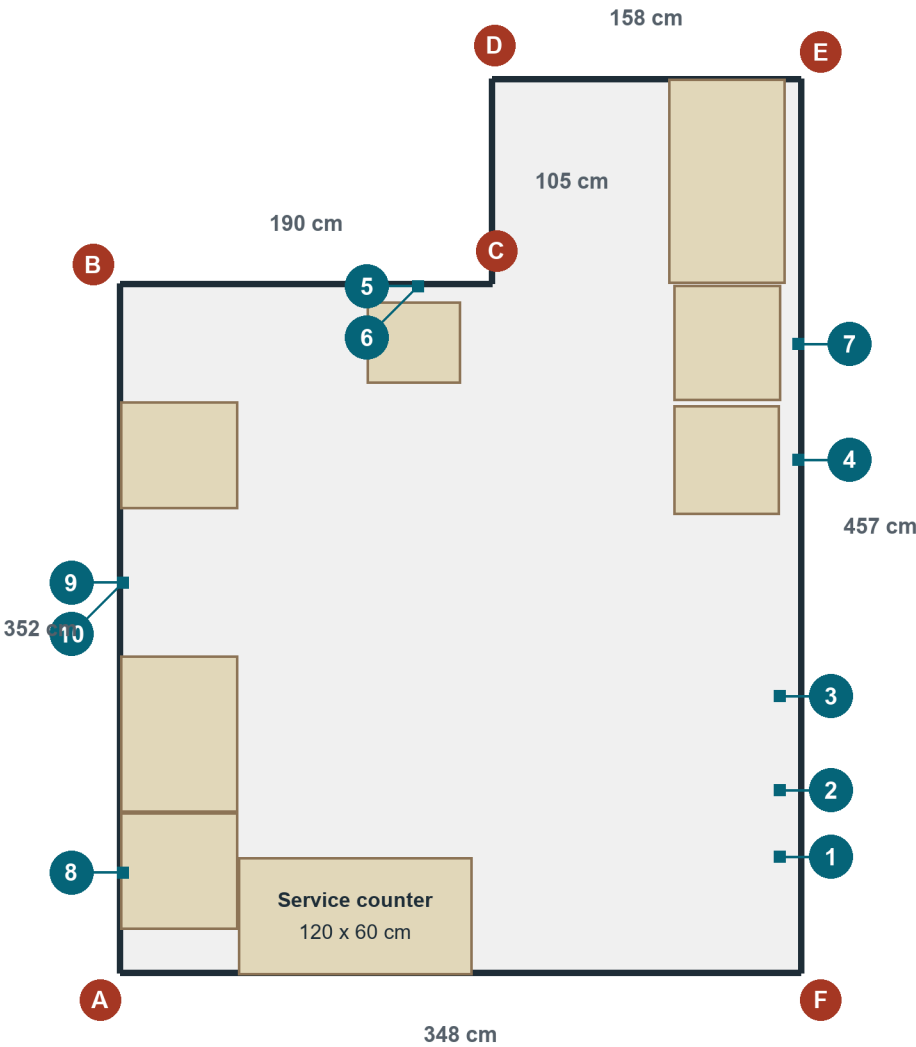

WHERE TO PUT EACH BOARD

- Kitchen lighting**
From corner F, measure 60 cm along the SAME wall. Centre: 115 cm above finished floor.
Aisle / Task lights / Showcase
- Kitchen dry prep power**
From corner F, measure 94 cm along the SAME wall. Centre: 115 cm above finished floor.
Kettle socket / Toaster socket / Mixer / spare socket
- Kitchen appliance controls**
From corner F, measure 142 cm along the SAME wall. Centre: 115 cm above finished floor.
Fridge / Microwave / Otg / Dishwasher / Ro
- Fridge connection provision reservation**
From corner E, measure 195 cm along the SAME wall. Centre: 45 cm above finished floor.
Fridge connection provision
- Microwave connection provision reservation**
From corner C, measure 38 cm along the SAME wall. Centre: 148 cm above finished floor.
Microwave connection provision
- OTG connection provision reservation**
From corner C, measure 38 cm along the SAME wall. Centre: 100 cm above finished floor.
OTG connection provision
- Dishwasher connection provision reservation**
From corner E, measure 136 cm along the SAME wall. Centre: 50 cm above finished floor.
Dishwasher connection provision
- Undercounter RO power provision reservation**
From corner A, measure 52 cm along the SAME wall. Centre: 45 cm above finished floor.
Undercounter RO power provision
- Potential hob ignition supply reservation**
From corner B, measure 153 cm along the SAME wall. Centre: 65 cm above finished floor.
Potential hob ignition supply
- Potential extractor supply reservation**
From corner B, measure 153 cm along the SAME wall. Centre: 220 cm above finished floor.
Potential extractor supply

The kitchen includes the former utility extension. The top-left cut-out is the open-shaft partition, not the old utility divider.

BED / FURNITURE SIZES

Fridge body: 55 cm across this drawing x 56 cm up/down this drawing; top 189 cm above floor.
Dishwasher body: 55 cm across this drawing x 59 cm up/down this drawing; top 84 cm above floor.
Microwave body: 48 cm across this drawing x 39 cm up/down this drawing; top 164 cm above floor.
OTG body: 48 cm across this drawing x 42 cm up/down this drawing; top 118 cm above floor.
Main sink worktop: 60 cm across this drawing x 105 cm up/down this drawing; top 89 cm above floor.
Small sink worktop: 60 cm across this drawing x 60 cm up/down this drawing; top 89 cm above floor.
Landing worktop: 60 cm across this drawing x 80 cm up/down this drawing; top 89 cm above floor.
Prep worktop: 60 cm across this drawing x 55 cm up/down this drawing; top 89 cm above floor.
Service counter: 120 cm across this drawing x 60 cm up/down this drawing; top 89 cm above floor.

Measure from the finished wall corner, not a door frame, cupboard or bed edge. Height starts at the finished floor, not skirting or tabletop.

PROPOSED MODEL DIMENSIONS - electrician must check on site before cutting. Equipment connection reservations are NOT approved sockets or installation marks; concealed points need designed service access. Bathroom switches stay outside: no shower partitions are planned.

ENTRY LOBBY


ELECTRICAL POSITIONS + MAIN FURNITURE SIZES

19 OCT 2026 | Electrical v004 - proposed room set-out

All measurements are in centimetres (cm), rounded to the nearest 1 cm.
Board distances and heights are to the CENTRE of the visible plate.

TOP VIEW - letters identify wall corners; numbers identify boards

Orange = doorway. Do not scale measurements off this drawing. Open-plan edges are not extra walls.

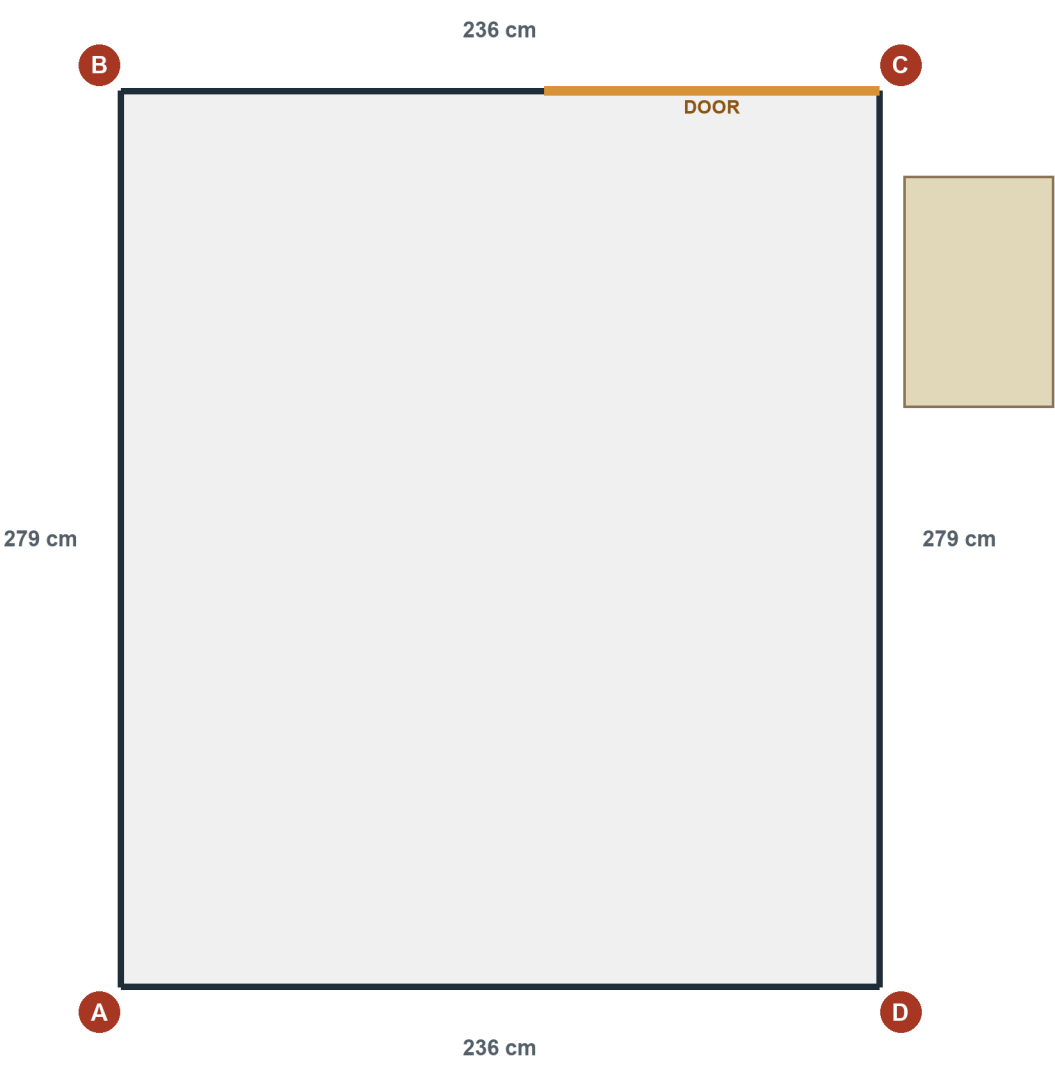

WHERE TO PUT EACH BOARD

No new electrical board is positioned in this space. Do not copy a board location from another room.
The lobby arrival light board is physically on the hall wall. See the HALL / FAMILY LOUNGE sheet for its marked corner and distances.
The wash-niche vanity is shown beside the main floor rectangle. The recess walls are not dimensioned on this simplified outline.

BED / FURNITURE SIZES

Wash-niche vanity: 47 cm across this drawing x 72 cm up/down this drawing; top 75 cm above floor.

Measure from the finished wall corner, not a door frame, cupboard or bed edge. Height starts at the finished floor, not skirting or tabletop.

PROPOSED MODEL DIMENSIONS - electrician must check on site before cutting. Equipment connection reservations are NOT approved sockets or installation marks; concealed points need designed service access. Bathroom switches stay outside: no shower partitions are planned.

REAR BATHROOM

ELECTRICAL POSITIONS + MAIN FURNITURE SIZES


19 OCT 2026 | Electrical v004 - proposed room set-out

All measurements are in centimetres (cm), rounded to the nearest 1 cm.

Board distances and heights are to the CENTRE of the visible plate.

TOP VIEW - letters identify wall corners; numbers identify boards

Orange = doorway. Do not scale measurements off this drawing. Open-plan edges are not extra walls.

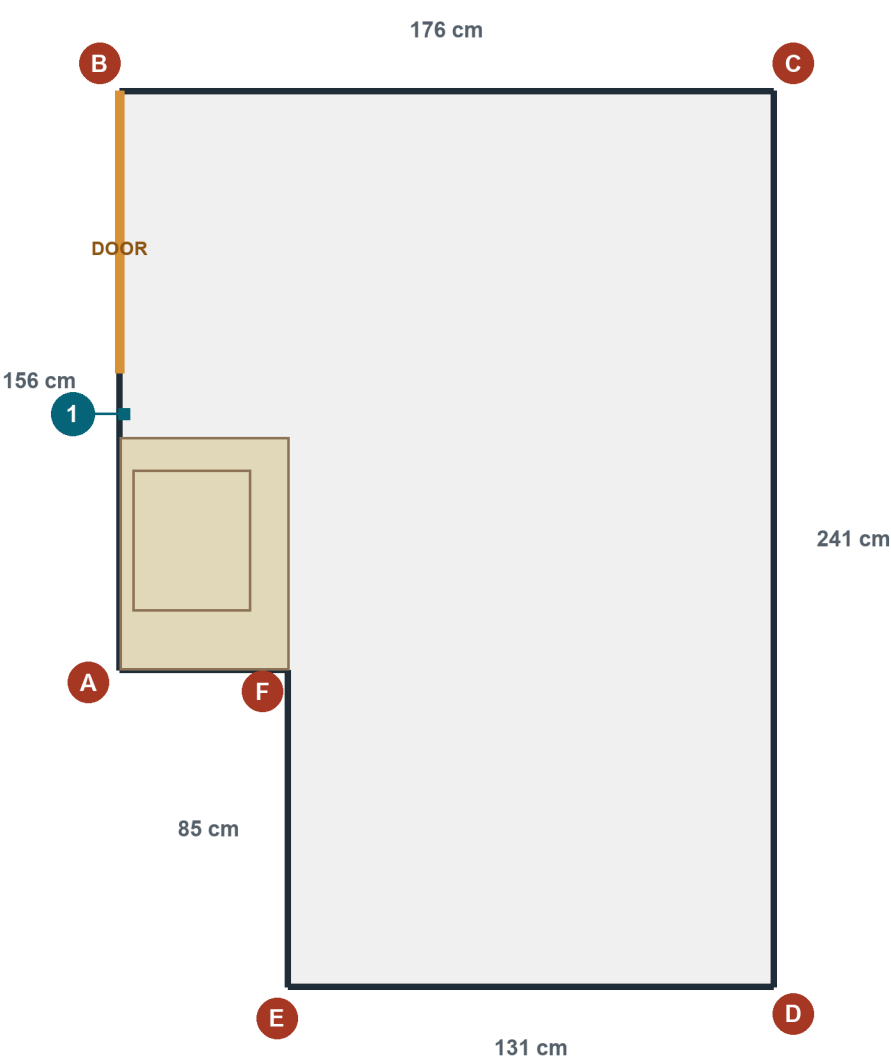

WHERE TO PUT EACH BOARD

1. BA1 Geyser connection reservation

From corner A, measure 69 cm along the SAME wall. Centre: 215 cm above finished floor.

Geyser connection reservation

Outside this bathroom: Bath 1 outside light / fan / mirror. See the rear bedroom sheet for its exact position.

BED / FURNITURE SIZES

Basin cabinet: 46 cm across this drawing x 63 cm up/down this drawing; top 75 cm above floor.

Geyser body: 32 cm across this drawing x 38 cm up/down this drawing; top 268 cm above floor.

Measure from the finished wall corner, not a door frame, cupboard or bed edge. Height starts at the finished floor, not skirting or tabletop.

PROPOSED MODEL DIMENSIONS - electrician must check on site before cutting. Equipment connection reservations are NOT approved sockets or installation marks; concealed points need designed service access. Bathroom switches stay outside: no shower partitions are planned.

MIDDLE BATHROOM

ELECTRICAL POSITIONS + MAIN FURNITURE SIZES


19 OCT 2026 | Electrical v004 - proposed room set-out

All measurements are in centimetres (cm), rounded to the nearest 1 cm.

Board distances and heights are to the CENTRE of the visible plate.

TOP VIEW - letters identify wall corners; numbers identify boards

Orange = doorway. Do not scale measurements off this drawing. Open-plan edges are not extra walls.

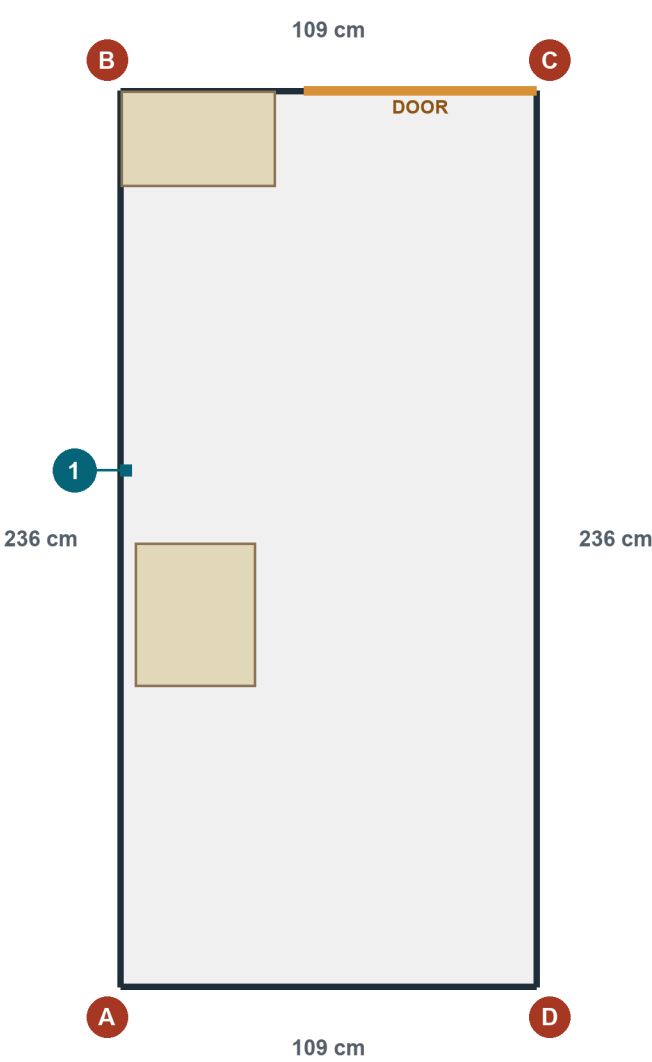

WHERE TO PUT EACH BOARD

1. BA2 Geyser connection reservation

From corner B, measure 100 cm along the SAME wall. Centre: 215 cm above finished floor.

Geyser connection reservation

Outside this bathroom: Bath 2 outside light / fan / mirror. See the middle bedroom sheet for its exact position.

BED / FURNITURE SIZES

Basin cabinet: 41 cm across this drawing x 25 cm up/down this drawing; top 75 cm above floor.

Geyser body: 32 cm across this drawing x 38 cm up/down this drawing; top 268 cm above floor.

Measure from the finished wall corner, not a door frame, cupboard or bed edge. Height starts at the finished floor, not skirting or tabletop.

PROPOSED MODEL DIMENSIONS - electrician must check on site before cutting. Equipment connection reservations are NOT approved sockets or installation marks; concealed points need designed service access. Bathroom switches stay outside: no shower partitions are planned.

FRONT BATHROOM

ELECTRICAL POSITIONS + MAIN FURNITURE SIZES


19 OCT 2026 | Electrical v004 - proposed room set-out

All measurements are in centimetres (cm), rounded to the nearest 1 cm.

Board distances and heights are to the CENTRE of the visible plate.

TOP VIEW - letters identify wall corners; numbers identify boards

Orange = doorway. Do not scale measurements off this drawing. Open-plan edges are not extra walls.

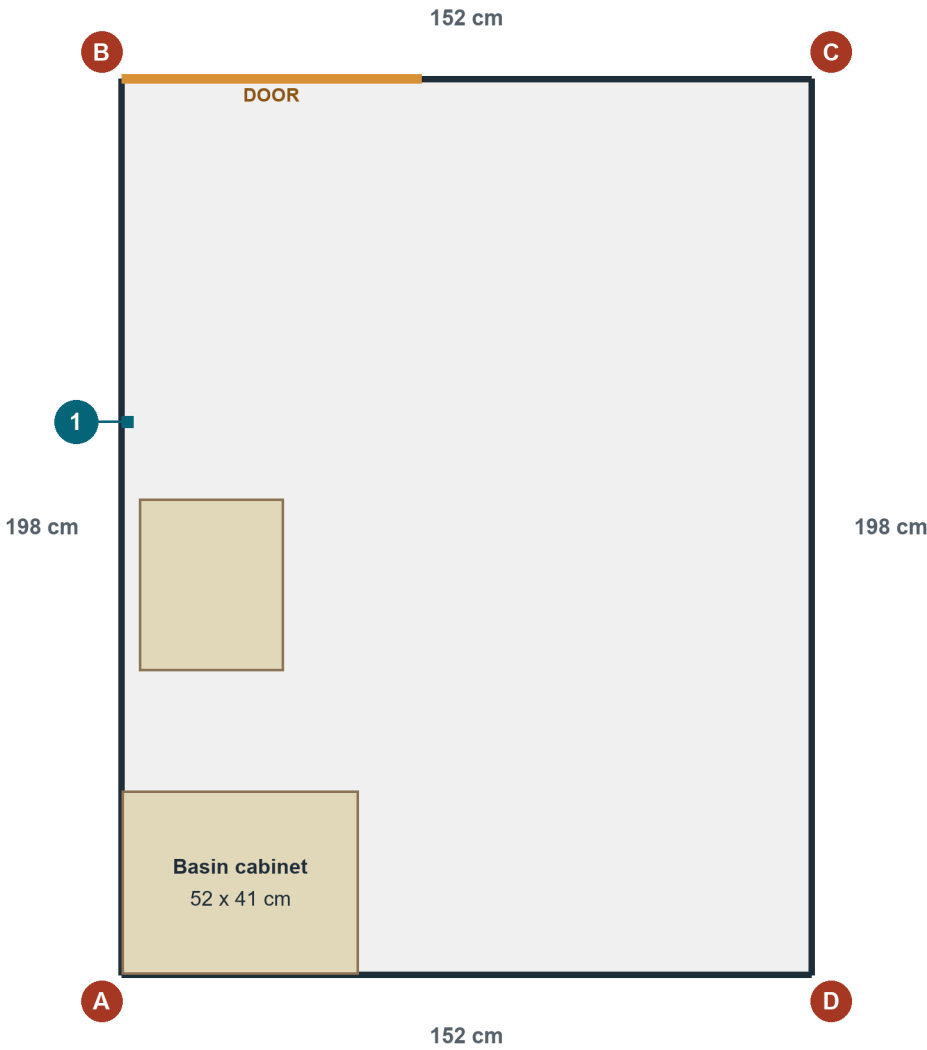

WHERE TO PUT EACH BOARD

1. BA3 Geyser connection reservation

From corner B, measure 76 cm along the SAME wall. Centre: 215 cm above finished floor.

Geyser connection reservation

Outside this bathroom: Bath 3 outside light / fan / mirror. See the front dressing sheet for its exact position.

BED / FURNITURE SIZES

Basin cabinet: 52 cm across this drawing x 41 cm up/down this drawing; top 75 cm above floor.

Geyser body: 32 cm across this drawing x 38 cm up/down this drawing; top 268 cm above floor.

Measure from the finished wall corner, not a door frame, cupboard or bed edge. Height starts at the finished floor, not skirting or tabletop.

PROPOSED MODEL DIMENSIONS - electrician must check on site before cutting. Equipment connection reservations are NOT approved sockets or installation marks; concealed points need designed service access. Bathroom switches stay outside: no shower partitions are planned.

FRONT DRESSING


ELECTRICAL POSITIONS + MAIN FURNITURE SIZES

19 OCT 2026 | Electrical v004 - proposed room set-out

All measurements are in centimetres (cm), rounded to the nearest 1 cm.
Board distances and heights are to the CENTRE of the visible plate.

TOP VIEW - letters identify wall corners; numbers identify boards

Orange = doorway. Do not scale measurements off this drawing. Open-plan edges are not extra walls.

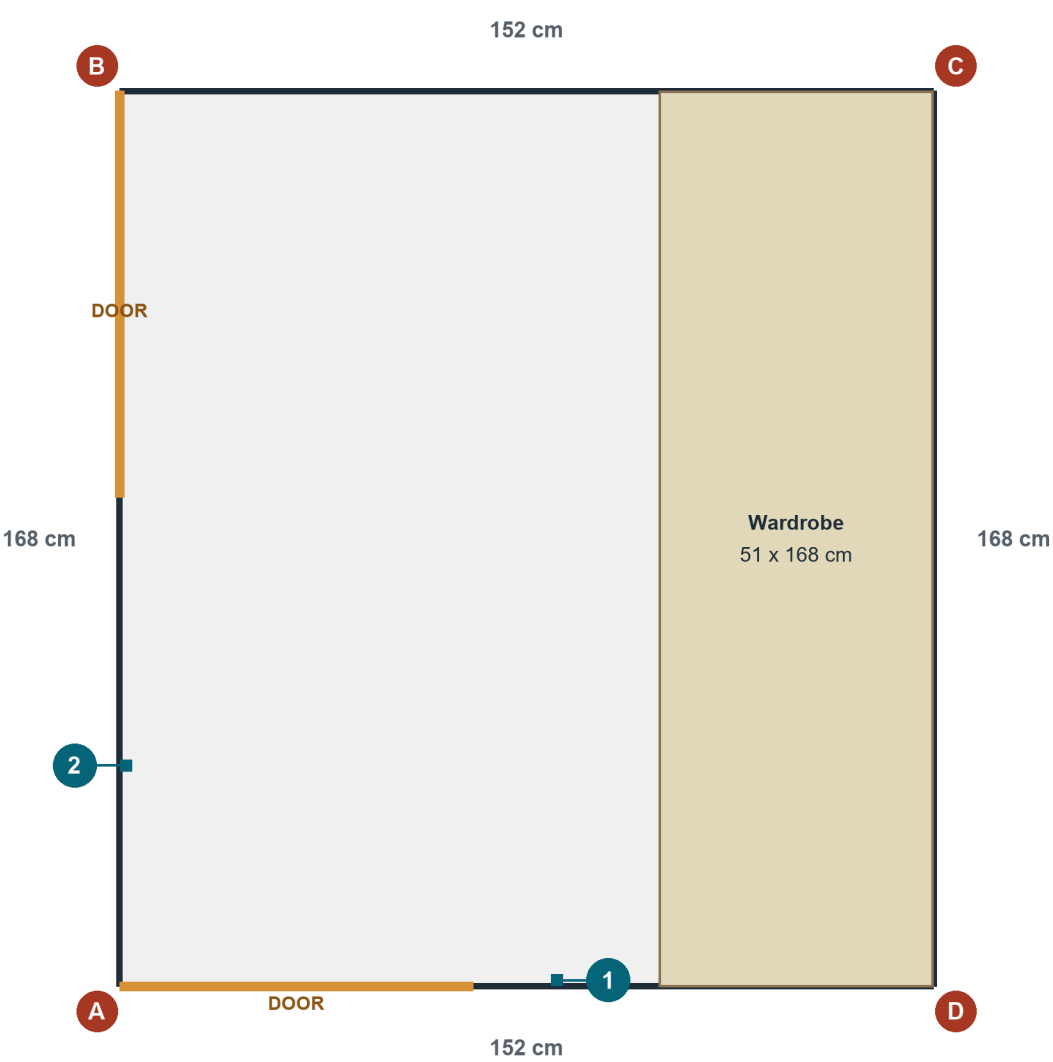

WHERE TO PUT EACH BOARD

- 1. Bath 3 outside light / fan / mirror
From corner D, measure 70 cm along the SAME wall. Centre: 115 cm above finished floor.
Bathroom ceiling light / Bathroom exhaust fan / Geyser power isolator / Mirror task light
- 2. Dressing light
From corner A, measure 41 cm along the SAME wall. Centre: 115 cm above finished floor.
Dressing

BED / FURNITURE SIZES

Wardrobe: 51 cm across this drawing x 168 cm up/down this drawing; top 239 cm above floor.

Measure from the finished wall corner, not a door frame, cupboard or bed edge. Height starts at the finished floor, not skirting or tabletop.

PROPOSED MODEL DIMENSIONS - electrician must check on site before cutting. Equipment connection reservations are NOT approved sockets or installation marks; concealed points need designed service access. Bathroom switches stay outside: no shower partitions are planned.

FORMER UTILITY STRIP - CONTEXT

ELECTRICAL POSITIONS + MAIN FURNITURE SIZES

19 OCT 2026 | Electrical v004 - proposed room set-out

All measurements are in centimetres (cm), rounded to the nearest 1 cm.
Board distances and heights are to the CENTRE of the visible plate.

TOP VIEW - letters identify wall corners; numbers identify boards

Orange = doorway. Do not scale measurements off this drawing. Open-plan edges are not extra walls.



WHERE TO PUT EACH BOARD

No new electrical board is positioned in this space. Do not copy a board location from another room.
This is the OLD utility-strip footprint, not a separate enclosed room in the current design. The divider was removed for the integrated kitchen; see the KITCHEN and REAR OPEN SHAFT / GRATE sheets. These letters mark the former footprint, not current wall corners.

BED / FURNITURE SIZES

No main furniture size is specified on this sheet. Wall lengths are shown above.

Measure from the finished wall corner, not a door frame, cupboard or bed edge. Height starts at the finished floor, not skirting or tabletop.

PROPOSED MODEL DIMENSIONS - electrician must check on site before cutting. Equipment connection reservations are NOT approved sockets or installation marks; concealed points need designed service access. Bathroom switches stay outside: no shower partitions are planned.

REAR OPEN SHAFT / GRATE

ELECTRICAL POSITIONS + MAIN FURNITURE SIZES

19 OCT 2026 | Electrical v004 - proposed room set-out

All measurements are in centimetres (cm), rounded to the nearest 1 cm.

Board distances and heights are to the CENTRE of the visible plate.

TOP VIEW - letters identify wall corners; numbers identify boards

Orange = doorway. Do not scale measurements off this drawing. Open-plan edges are not extra walls.



WHERE TO PUT EACH BOARD

No new electrical board is positioned in this space. Do not copy a board location from another room.

BED / FURNITURE SIZES

No main furniture size is specified on this sheet. Wall lengths are shown above.

Measure from the finished wall corner, not a door frame, cupboard or bed edge. Height starts at the finished floor, not skirting or tabletop.

PROPOSED MODEL DIMENSIONS - electrician must check on site before cutting. Equipment connection reservations are NOT approved sockets or installation marks; concealed points need designed service access. Bathroom switches stay outside: no shower partitions are planned.

STAIR ENTRANCE LANDING

ELECTRICAL POSITIONS + MAIN FURNITURE SIZES


19 OCT 2026 | Electrical v004 - proposed room set-out

All measurements are in centimetres (cm), rounded to the nearest 1 cm.

Board distances and heights are to the CENTRE of the visible plate.

TOP VIEW - letters identify wall corners; numbers identify boards

Orange = doorway. Do not scale measurements off this drawing. Open-plan edges are not extra walls.

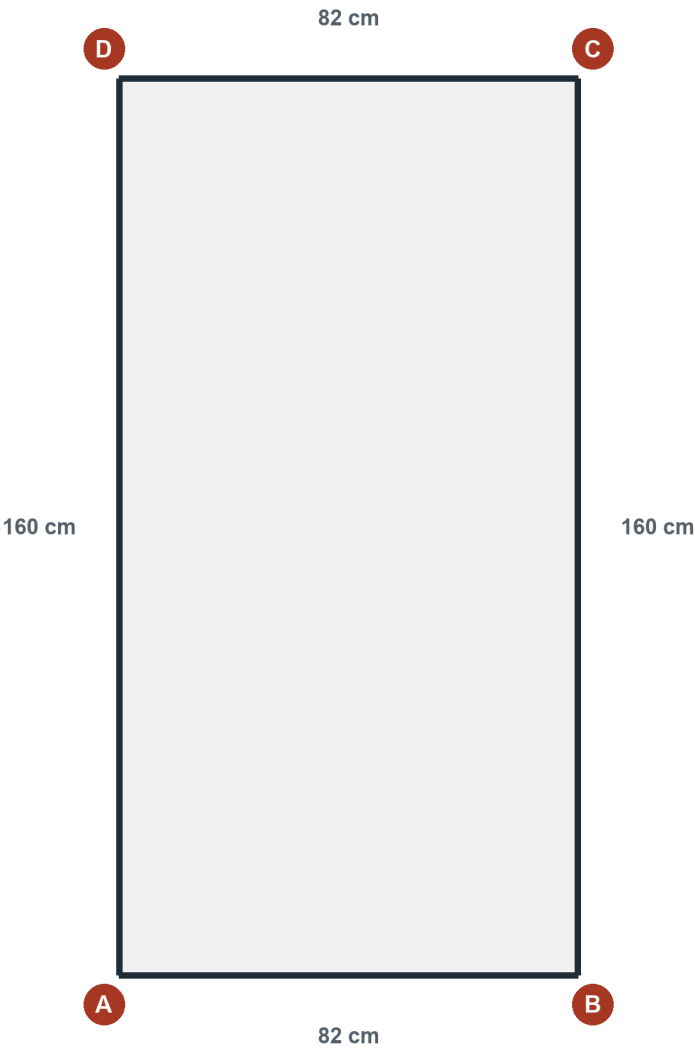

WHERE TO PUT EACH BOARD

No new electrical board is positioned in this space. Do not copy a board location from another room.

BED / FURNITURE SIZES

No main furniture size is specified on this sheet. Wall lengths are shown above.

Measure from the finished wall corner, not a door frame, cupboard or bed edge. Height starts at the finished floor, not skirting or tabletop.

PROPOSED MODEL DIMENSIONS - electrician must check on site before cutting. Equipment connection reservations are NOT approved sockets or installation marks; concealed points need designed service access. Bathroom switches stay outside: no shower partitions are planned.